



您正在使用  
ZwCAD 2005 試用版  
詳情請查閱WWW.ZwCAD.COM

ITEM NO.	LENGTH(L)	PACKING	
CF802S	2M	1/MY.#CPB/S1	10/BOX+LABEL-80/CTN
CF803S	3M	1/MY.#CPB/S1	10/BOX+LABEL-80/CTN
CF804S	5M	1/MY.#CPB/M	10/BOX+LABEL-40/CTN

\*NOTE: ALL relevant materials complied with RoHS directive

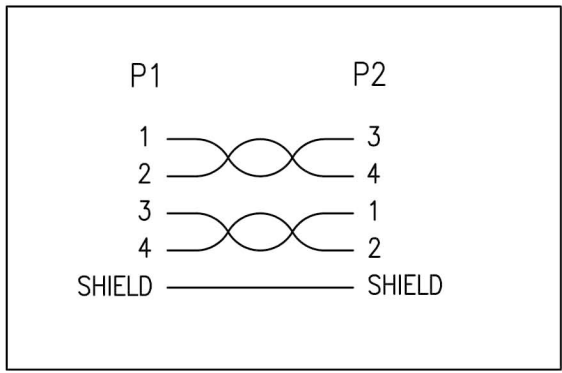

3	BLACK HEAT SHRINK TUBE $\phi$ 1.0*5mm	4	M743
	MOLDED PVC BLACK		M304
2	UL20276 IEEE1394 CABLE, 2 TWISTED PAIRS 30AWG, OD 4.8mm, JACKET BLACK	L	M2
1	IEEE1394 4P MALE, GOLD FLASH ON CONTACTS&METAL HOOD, BLACK INSULATOR	2set	M108
No.	DESCRIPTION	Q'TY	Supplier
APPROVED		 Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm$ 10mm 201~1000mm $\pm$ 20mm 1001 ~1500mm $\pm$ 25mm 1501~2100mm $\pm$ 30mm 2100mm $\uparrow$ $\pm$ 40mm	
CHECKED	TIAN		
DRAWING	ZOE		
DATE	26/JUN/07		
ITEM NO.		UNIT:mm	

CHECKED